


# ComAnt<sup>®</sup> Communications Antennas

## FREQUENCY INDEPENDENT DATA




Description:	directional yagi
Frequency:	135-145 MHz, 144-156 MHz, 154-166 MHz, 163-177 MHz, 226-353 MHz, 380-410 MHz, 405-440 MHz, 440-475 MHz, 830-890 MHz, 890-960 MHz
Impedance:	50 ohm
Gain:	6 dBi
Polarization:	vertical/horizontal
Connector:	N-female/TNC-female
VSWR:	< 1.5
Radome:	UV resistant ABS, PU foam filling, RAL 7012
Radiator:	copper
Passive elements:	coated aluminium
Attachment:	Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self-locking nuts
Lightning protection:	DC-short circuited
Temperature:	-35° - +80° C
IP:	67

**CA400Y**  
directional yagi 6 dBi 380-410 MHz  
2/15/2000

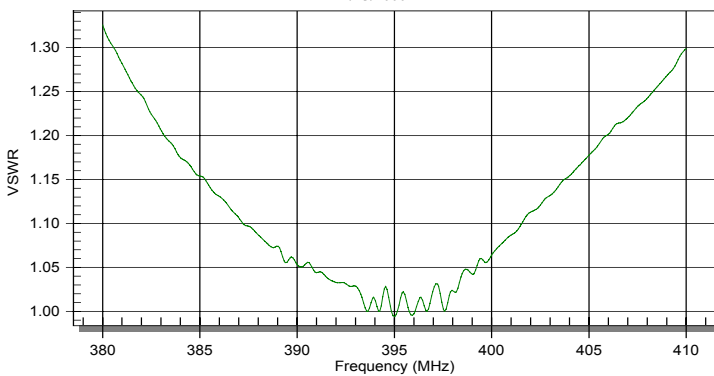

## RADATION PATTERN

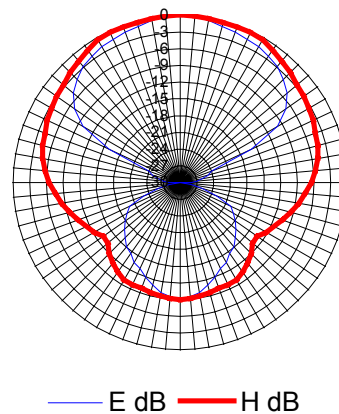

**CAY** DIRECTIONAL YAGI