



ComAnt[®] Communications Antennas

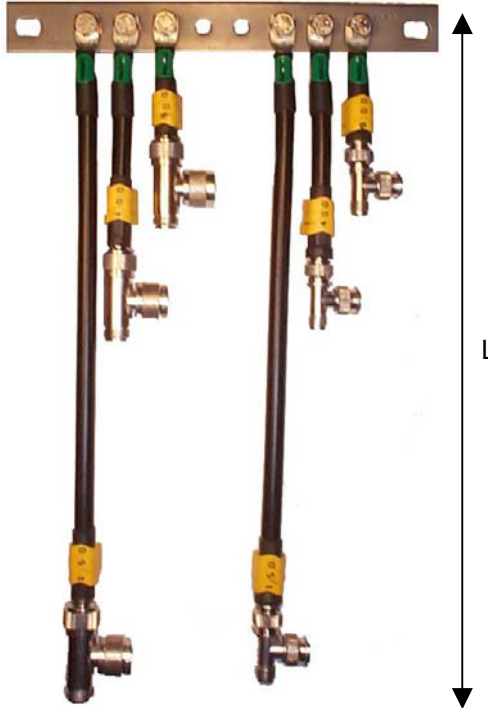

FREQUENCY INDEPENDENT DATA

Description: lightning protector, quarter wave shorting stub
Frequency: 144-176 MHz, 380-475 MHz, 830-960 MHz, 2300-2500 MHz
Impedance: 50 ohm
Connector: N-female – N-male, TNC-female – TNC-male
VSWR: < 1.2
Attachment: M8
Temperature: -35° - +80° C
IP: 67 (LP-N), 62 (LP-TNC)

LP900-N
lightning protector 830-960 MHz
2/14/2000

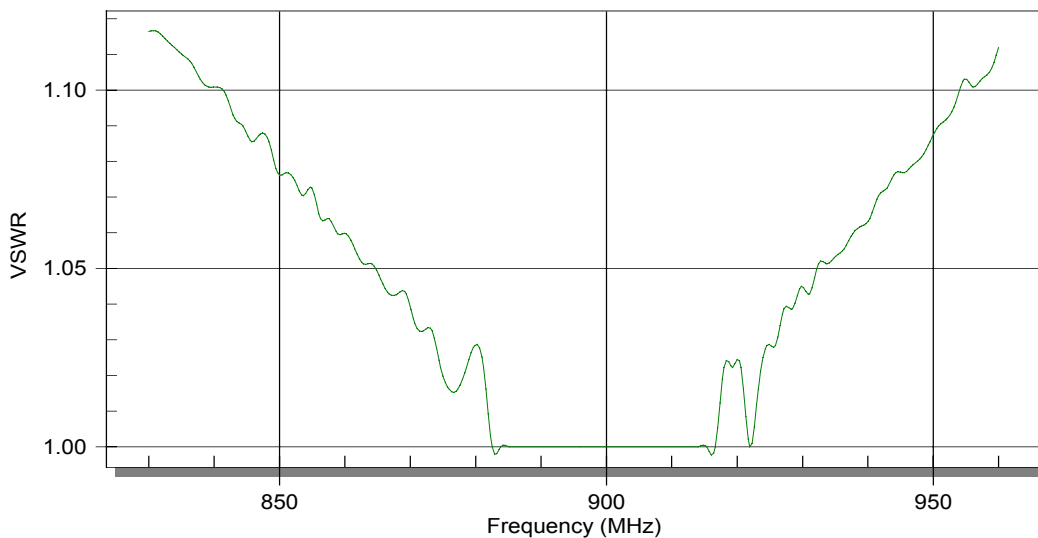

LP LIGHTNING PROTECTOR