



Switch Settings

TD-32B

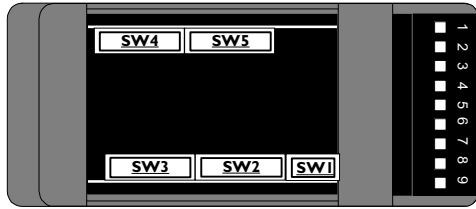

Important orientate using "ON"

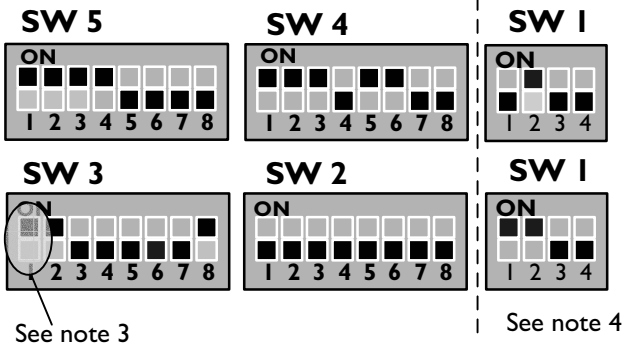

Notes

1. For the 1785KE, 1747KE, 1770KF2 and 1770KF3 no AT commands are required.
2. The TD-32B is connected to the RS-232 / DFI port on the above Allen Bradley protocol converters.
3. Select switch 3 Dip 1 to ON for 2 wire leased line or OFF for 4 wire leased line.
4. The switch's are shown for answer and originate respectively.

Connections

