


19" Managed Ethernet Switch RedFox 5328 Series



- **At the core of large high-performance industrial networks**
 - 28 ports with up to 4 SFP fibre ports
 - Powerful CPU and switchcore
 - Advanced WeOS support
- **Designed for demanding Edge Network applications**
 - Both DC and AC power option
 - Multiple network resilience solutions
 - Industrial, trackage and marine type tested
- **Robust and reliable for long service life**
 - Class-leading MTBF
 - Ultra-robust IP40 metal housing with all connectors on front
 - Only industrial grade components
- **Unique future proof industrial networking solutions**
 - Advanced cybersecurity features
 - Routing acceleration in hardware¹
 - IEEE 1588v2 Precision Time Protocol (PTP)

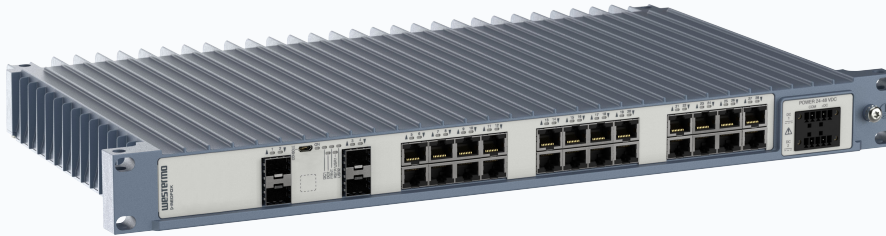

EN 50121-4
Railway Trackage

EN 61000-6-1
Residential Immunity

EN 61000-6-2
Industrial Immunity

EN 61000-6-3
Residential Emission

EN 61000-6-4
Industrial Emission

EN 61010-1
Safety Industrial Equipment

The RedFox 5328 series is designed for the core of large high-performance industrial networks and has been developed to cater to the needs of current and future industrial data networks, combining outstanding performance, durability and reliability. These switches are ideal for handling the big data and high bandwidth requirements typically found within transportation, manufacturing, energy, smart cities and other applications.

Integrating hardware, software and network design support tools, this next generation switch platform offers advanced capabilities, the lowest total cost of ownership and will create the most reliable and resilient networks on the market.

The switch is engineered to maintain uninterrupted data communication, even in exceptionally harsh environments. The RedFox 5328 series is tested and certified to withstand extreme temperatures, vibrations and shocks. The switches only use industrial grade components which contributes towards a market leading mean time between failure (MTBF), maximized service life, and reduced operational and life cycle costs.

Various port configurations are available, that can be further customized with SFP transceivers. The RedFox 5328 series is available with either a DC or AC power supply.


The RedFox 5328 series is powered by the next generation WeOS operating system, which ensures robust operation and support for an expanding range of protocols and features. In addition, recognizing the growing sophistication of cyberattacks, an extensive suite of cyber security tools is available.

The switches are also prepared for routing acceleration, extended cybersecurity and time synchronization IEEE 1588v2 applications, making them an ideal solution to meet future security and bandwidth requirements.

¹Released in 2nd phase

Specifications - RedFox 5328

Dimensional drawing

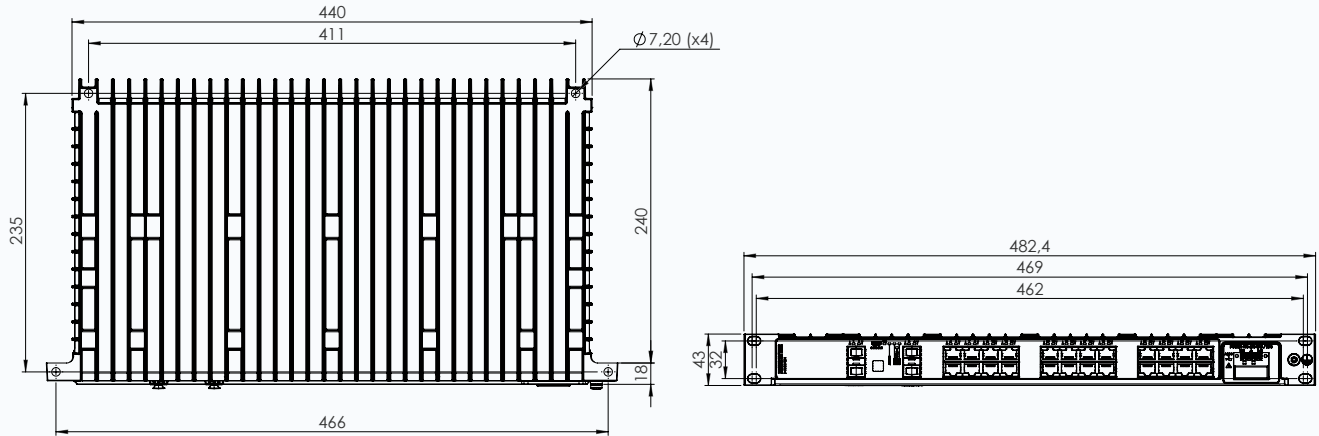

Housing

| | |
|------------------------|---|
| Dimensions (W x H x D) | 482,4 x 43 x 258 mm (18.99 x 1.69 x 10.16 inches) |
| Housing | Full metal |
| Weight | 3.8 kg |

Interface

| | |
|----------------------------------|----|
| RJ-45 copper ports 10/100 Mbit/s | 24 |
| SFP 100/1000 Mbit/s | 4 |
| Console micro USB | 1 |

Power parameters

| | RedFox-5328 LV | RedFox-5328 HV |
|---------------------------------|--------------------------------------|--|
| Rated voltage | 24 to 48 VDC | 110 to 240 V AC/DC |
| Operating voltage | 18 to 60 VDC | 85 to 264 V AC/DC |
| Rated current, all T24 models | 0.73 A at 24 VDC 0.37 A at 48 VDC | 0.10 A at 240 V AC/DC 0.19 A at 110 V AC/DC |
| Dual input | ◆ | |
| Galvanic isolation to all ports | ◆ | ◆ |

Models

RedFox-5300 LV

RedFox-5300 HV

Environmental

| | | |
|---|---|---|
| Temperature, operating: -40 to +74°C (-40 to +165°F) | ◆ | |
| Temperature, operating: -40 to +70°C (-40 to +158°F) | | ◆ |
| Temperature, storage and transport: -50 to +85°C (-58 to +185°F) | ◆ | ◆ |
| Ingress protection: IP40 | ◆ | ◆ |
| Humidity, operating: 5-95% relative humidity | ◆ | ◆ |
| Corrosive gases: IEC 60068-2-60 | ◆ | |
| Altitude: 2000 mA/80 kPA | ◆ | ◆ |

MTBF hours

| | | |
|---------------------------|---------------|---------------|
| Telcordia, all T24 models | 643.000 hours | 678,000 hours |
|---------------------------|---------------|---------------|

| Approvals EMC | | |
|---------------|---|---|
| EN 61000-6-1 | ◆ | |
| EN 61000-6-2 | ◆ | ◆ |
| EN 61000-6-3 | ◆ | |
| EN 61000-6-4 | ◆ | ◆ |

| Approvals EMI | | |
|-------------------------|---|---|
| FCC Part 15.105 class A | | ◆ |
| FCC Part 15.105 class B | ◆ | |

| Approvals Safety | | |
|--------------------------------|---|---|
| EN/IEC/UL 62368-1 | ◆ | |
| EN/IEC/UL 61010-1, 61010-2-201 | | ◆ |

| Approvals Trackside | | |
|---------------------|---|---|
| EN 50121-4 | ◆ | ◆ |
| IEC 62236-4 | ◆ | ◆ |

| Switch properties | | |
|-------------------|--|----|
| Number of VLAN | | 64 |
| Priority queues | | 8 |

| Software | |
|----------|---|
| WeOS | WeOS 5; https://www.westermo.com/solutions/weos |
| WeConfig | https://www.westermo.com/solutions/weconfig |

| Warranty | |
|----------|---------|
| Validity | 5 years |

| Art.no. | Product | WeOS standard | WeOS extended |
|-----------|--------------------------|---------------|---------------|
| 3641-4710 | RedFox-5328-F4G-T24-LV | ◆ | |
| 3641-4718 | RedFox-5328-F4G-T24-HV | ◆ | |
| 3641-4610 | RedFox-5328-E-F4G-T24-LV | | ◆ |
| 3641-4618 | RedFox-5328-E-F4G-T24-HV | | ◆ |

| Accessories | |
|-----------------------|---|
| 3125-0150 | PS-60, power supply, DIN-mounted (available for LV models) |
| 100 Mbit transceivers | https://www.westermo.com/products/accessories/sfp-transceivers/100m-sfp-transceivers |
| 1 Gbit transceivers | https://www.westermo.com/products/accessories/sfp-transceivers/1gbit-sfp-transceivers |
| WeConfig | https://www.westermo.com/products/software/weconfig |

Specification WeOS 5

The WeOS operating system has been developed by Westermo for its current as well as future range of Ethernet hardware products. This layer 2 and layer 3 switching solution enables Westermo to create complex multimedia ring networks and routing solutions. WeOS not only provides solutions to many challenging industrial networking issues, but also helps to protect investments by ensuring the future availability of fully compatible solutions. WeOS is the core of our latest ranges of Ethernet hardware allowing complex multimedia ring networks and routing solutions to be created.

Westermo has many years of experience developing products for industrial applications. At the heart of all Westermo networking solutions is the need for ease of use. By standardising on a single operating system for all Westermo Ethernet products this helps to simplify the installation, operation and maintenance of individual devices and complete networks. Once a user is familiar with a Westermo product, that knowledge can be readily applied to all our other devices. A web screen simplifies the configuration of many functions, whilst a command line interface allows for fine tuning.

| WeOS Standard - Layer 2 protocols and functionality |
|---|
| Resilience and High Availability FRNTv0/v2 flexible ring topologies (multiring, subrings and ring coupling), IEEE 802.1D/802.1w (RSTP), IEEE 802.1AX/802.3ad Link Aggregation (LACP and Static), IEC 62439-2 Media Redundancy Protocol (MRP; single instance or dual instances at MRP master) ^a |
| Layer 2 Switching IEEE 802.1D MAC Bridges, IEEE 802.1Q Static VLAN and VLAN Tagging, IEEE 802.1AB LLDP, IGMPv1/v2/v3 Snooping, Static Multicast MAC filters |
| Layer 2 QoS IEEE 802.1p Class of Service with flexible classification (VLAN tag priority, IP DSCP/ToS, Port ID), MAC Authentication, IEEE 802.1X Port Access Control, Ingress and Egress Rate limiting |
| IP Host Services Static IP Address, DHCP Client, DNS Client, DDNS, ZeroConf (mDNS and SSDP), NTP Client (NTPv4), IP Interfaces (Ethernet, VLAN, Loopback and Blackhole) |
| Network Servers DHCP Server (including options 1, 3, 6, 7, 12, 15, 42, 61, 66, 68 and 82), DHCP Relay Agent (including options 54 and 82), DNS Proxy Server (DNS forwarder and Host records), NTP client/server (NTPv4) |
| Management Tools Westermo configuration tool WeConfig, Web interface (HTTP and HTTPS), Command Line Interface (CLI) via console port, SSHv2 and Telnet, Local and Central Authentication (RADIUS/TACACS+), Role Based Access Control (RBAC), Password Compliance Policy, SNMPv1/v2c/v3, Secure Copy (SCP) for remote file upload and download, Local file management (via HTTP, FTP, TFTP and SCP), Tech support button, Flexible alarm and event handling system, RFC5424/RFC3164 Syslog (log files and remote syslog server), Port monitoring |
| SNMP MIB Support (read-only) RFC 1213 MIB-2, RFC 2819 RMON MIB, RFC 2863 Interface MIB, RFC 3433 Entity Sensor MIB, RFC 3635 Ether-like Interface MIB, RFC 4133 Entity MIB, RFC 4188 Bridge MIB, RFC 4318 RSTP MIB, RFC4363 Q-BRIDGE MIB, RFC 4836 MAU MIB, IEEE 802.1AB LLDP MIB, IEEE 802.1AX LAG MIB, IEC 62439-2 MRP MIB, WESTERMO-DDM MIB (SFP), WESTERMO-EVENT MIB, WESTERMO-FRNT MIB, WESTERMO-INTERFACE MIB, WESTERMO-TCN MIB |

^a Available as add-on-function. Please see your local Westermo sales contact to purchase a license for your product.

| WeOS Extended - Layer 3 protocols and functionality ^a |
|---|
| IP Host Services IP Interfaces (SSL, VPN, GRE) |
| IP Routing and VPN Static IP Routing, Floating Static Routes, Multinetting, Proxy ARP, Dynamic IP routing (OSPFv2, RIPv1/v2), VRRPv2/v3, Protocol Independent Multicast - Sparse-Mode (PIM-SM), Static Multicast Routing, Stateful Inspection Firewall, Firewall Hit Counters, IP Masquerading (NAT/NAPT), Port Forwarding, Stateless NAT (1-1 NAT), SSL VPN (Client and Server, Certificate Authentication, Pre-shared Key (PSK) Point-to-Point Mode, Layer-2 and Layer-3 VPN, Layer-2 VPN bridging, Address pool and address per CN, TLS Authentication), Generic Routing Encapsulation (GRE), Policy Based Routing, Equal-Cost Multi-Path (ECMP), OpenVPN Multipath TCP (MPTCP), Route monitor |
| SNMP MIB Support (read-only) RFC 2787 VRRPv2 MIB, RFC 6527 VRRPv3 MIB |

^a Products with software level WeOS Extended include all functionality listed for WeOS Standard