



Lynx 3000 Series Gen2

Managed Ethernet switches and routers



Table of Contents

1. General Information	3
1.1. Legal Information	3
1.2. About This Guide	3
1.3. Software Tools	3
1.4. License and Copyright for Included FLOSS	3
1.5. WeOS	3
1.6. Integrity Seal	3
2. Safety and Regulations	4
2.1. Warning Levels	4
2.2. Safety Information	5
2.3. Care Recommendations	7
2.4. Product Disposal	7
2.5. Compliance Information	7
2.5.1. Agency Approvals and Standards Compliance	7
2.5.2. AREMA	8
2.5.3. FCC Part 15.105 Class A Notice	9
2.5.4. Corrosive Environment	9
2.5.5. Simplified Declaration of Conformity	10
3. Product Description	11
3.1. Product Description	11
3.2. Available Models	12
3.3. Hardware Overview	13
3.4. Connector Information	14
3.4.1. Power Input	14
3.4.2. I/O Connection	14
3.4.3. Console Port	15
3.4.4. SFP Transceivers	15
3.5. LED Indicators	17
3.6. Dimensions	18
4. Installation	19
4.1. Mounting	19
4.2. Removal of Product	19
4.3. Panel Mounting	20
4.4. Wall Mounting	21
4.5. Cable Strap	21
4.6. Functional Earth Connection	22
4.7. Cooling	22
4.8. Ambient Temperature	23
5. Specifications	24
5.1. Interface Specifications	24
5.2. Type Tests and Environmental Conditions	30
6. Revision Notes	35

1. General Information

1.1. Legal Information

The contents of this document are provided “as is”. Except as required by applicable law, no warranties of any kind are made in relation to the accuracy and reliability or contents of this document, either expressed or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Westermo reserves the right to revise this document or withdraw it at any time without prior notice.

Under no circumstances shall Westermo be responsible for any loss of data or income or any special, incidental, and consequential or indirect damages howsoever caused.

More information about Westermo can be found at www.westermo.com.

1.2. About This Guide

This guide is intended for installation engineers and users of the Westermo products.

It includes information on safety and regulations, a product description, installation instructions and technical specifications.

1.3. Software Tools

Related software tools are available at <https://www.westermo.com/support/product-support>.

1.4. License and Copyright for Included FLOSS

This product includes software developed by third parties, including Free/Libre Open Source Software (FLOSS). The specific license terms and copyright associated with the software are included in each software package respectively. Please visit the product web page for more information.

Upon request, the applicable source code will be provided. A nominal fee may be charged to cover shipping and media. Please direct any source code request to your normal sales or support channel.

1.5. WeOS

This product runs WeOS 5 (Westermo Operating System). Instructions for quick start, configuration and factory reset are found in the WeOS user documentation at www.westermo.com.

1.6. Integrity Seal

To ensure that the product package has not been opened, there is an integrity seal. If the seal is unexpectedly broken or missing contact your support channel for advice.

2. Safety and Regulations

2.1. Warning Levels

Warning signs are provided to prevent personal injuries and/or damages to the product. The following levels are used:

Level of warning	Description	Consequence personal injury	Consequence material damage
 WARNING	Indicates a potentially hazardous situation	Possible death or major injury	Major damage to the product
 CAUTION	Indicates a potentially hazardous situation	Minor or moderate injury	Moderate damage to the product
 NOTICE	Provides information in order to avoid misuse of the product, confusion or misunderstanding	No personal injury	Minor damage to the product
 NOTE	Used for highlighting general, but important information	No personal injury	Minor damage to the product

Table 1. Warning levels

2.2. Safety Information

Before installation:

Read this manual completely and gather all information available on the product. Make sure it is fully understood. Check that your application does not exceed the safe operating specifications for the product.



SAFETY DURING INSTALLATION

The product must be installed and operated by qualified service personnel and installed into an apparatus cabinet or similar, where access is restricted to service personnel only.

Before energising and connecting communication cables to the product, ensure a protective earthing conductor is first connected to the protective earthing terminal (only valid for metallic housings). Westermo recommends a cross-sectional area of at least 4 mm².

Upon removal of the product, disconnect the product from the power supply and all other communication ports before disconnecting the protective earthing conductor, or the connection to earth via the DIN-rail.



HAZARDOUS VOLTAGE

Do not open an energised product. Hazardous voltage may occur when connected to a power supply.



PROTECTIVE FUSE

It must be possible to disconnect manually from the power supply. Ensure compliance to national installation regulations.

Replacing the internal fuse must only be performed by Westermo qualified personnel.



POWER SUPPLY CONNECTION

There are safety regulations governing the power source that can be used in conjunction with the product. Refer to chapter Interface Specifications.



REDUCE THE RISK OF FIRE

To reduce the risk of fire, use only telecommunication line cords with a cable diameter of AWG 26 or larger. Regarding power cable dimensions, see chapter Interface Specifications.



HOT SURFACE

Be aware that the surface of this product may become hot. When it is operated at high temperatures, the external surface may exceed Touch Temperature Limit according to the product's relevant electrical safety standard.



CLASS 1 LASER PRODUCT

Do not look directly into a fibre optical port or any connected fibre, although the product is designed to meet the Class 1 Laser regulations and complies with 21 CFR 1040.10 and 1040.11.



HANDLING OF SFP TRANSCEIVERS

SFP transceivers are supplied with plugs to avoid contamination inside the optical port. They are very sensitive to dust and dirt. If the fibre optic cable is disconnected from the product, a protective plug must be used on the transmitter/receiver. The protective plug must be kept on during transportation. The fibre optic cable must be handled the same way.



CORROSIVE GASES

If the product is placed in a corrosive environment, it is important that all unused connector sockets are protected with a suitable plug, in order to avoid corrosion attacks on the gold plated connector pins.



ELECTROSTATIC DISCHARGE (ESD)

Prevent electrostatic discharge damage to internal electronic parts by discharging your body to a grounding point (e.g. use a wrist strap).



CABLE TEMPERATURE RATING FOR FIELD TERMINAL WIRES

There may be a requirement on the minimum temperature rating of the cable to be connected to the field wiring terminals, see chapter Interface Specifications.

2.3. Care Recommendations

Follow the care recommendations below to maintain full operation of the product and to fulfill the warranty obligations:

- Do not drop, knock or shake the product. Rough handling above the specification may cause damage to internal circuit boards.
- Use a dry or slightly water-damp cloth to clean the product. Do not use harsh chemicals, cleaning solvents or strong detergents.
- Do not paint the product. Paint can clog the product and prevent proper operation.

If the product is used in a manner not according to specification, the protection provided by the equipment may be impaired.

If the product is not working properly, contact the place of purchase, the nearest Westermo distributor office or Westermo technical support.

2.4. Product Disposal

This symbol means that the product shall not be treated as unsorted municipal waste when disposing of it. It needs to be handed over to an applicable collection point for recycling electrical and electronic equipment.

Proper disposal of the product helps minimize hazardous substances and prevents potential negative impacts on both the environment and human health.



Figure 1. WEEE symbol for treatment of product disposal

2.5. Compliance Information

2.5.1. Agency Approvals and Standards Compliance

Type	Approval/Compliance
EMC	• EN/IEC 61000-6-2, Immunity industrial environments • EN/IEC 61000-6-4, Emission industrial environments
Environmental^a	• NEMA TS 2, Traffic Controller Assemblies with NTCIP Requirements • AREMA; Communications and Signals manual^b
Security^c	• IEC 62443-4-2, Security level 2
Safety	• EN/IEC/UL 61010-1, -2-201, Safety requirements for electrical equipment for measurement, control, and laboratory use
Trackside	• EN 50121-4/IEC 62236-4, Railway signalling and telecommunications apparatus
Marine	• DNV GL rules for classification - Ships and offshore units

^aApplicable for non-PoE models only

^bValid for Lynx-3510(-E)-F4G-T6G-LV, Lynx-3510(-E)-F2G2.5-F2G-T6G-LV and all form factor B models (Lynx-3518)

^cValid for Lynx 3306, 3310 and 3510 models

Table 2. Agency approvals and standards compliance

2.5.2. AREMA

Lynx-3510(-E)-F4G-T6G-LV, Lynx-3510(-E)-F2G2.5-F2G-T6G-LV and all form factor B models (Lynx-3316, -3318 and -3518) have been tested according to AREMA Part 11.3.3, 11.5.1 and 11.5.2.

Port	Test	Remark
DC Power	3 x U _N , 80 ms	U _N (max)=24 VDC when powered from a vital signal battery

Table 3. AREMA Part 11.3.3 C.4. - Signal equipment surge withstand capability for DC input port

	Class C	Class D	Class E	Remarks
Temperature	X	X	X	
Relative humidity	X	X	X	
Vibration	X	X	X	
Mechanical shock	X	X	X	
Dielectric strength			X	Power and I/O: 1.5 kVAC Ethernet: 0.6 kVAC

Table 4. AREMA Part 11.5.1. - Environmental Class

	External	Internal
Enclosure port		
Radiated RF immunity	X	X
Power Frequency Magnetic Field	X	X
Pulse Magnetic Field	X	X
DC power port		
EFT/Burst	X	X
Surge (1.2/50µs)	-	X
Conducted RF	X	X
DI-, DO-port		
EFT/Burst	X	X
Surge (1.2/50µs)	-	X
Conducted RF	X	X
Ethernet ports		
EFT/Burst	X	X
Surge (1.2/50µs)	X	X
Conducted RF	X	X

Table 5. AREMA Part 11.5.2. - Exposure Class

AREMA Part 11.3.3.E. - Equipment surge withstand documentation DC power port

1. Maximum normal circuit voltage when powered from a vital signal battery is 24 VDC otherwise 48 VDC
2. Surge protection clamping voltage is 58.1 VDC
3. Maximum energy handling capability is 2 J, 1 ms

2.5.3. FCC Part 15.105 Class A Notice

This product has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference when the product is operated in a commercial environment.

This product generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the user manual, may cause harmful interference to radio communications. Operation of this product in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at the users own expense.

2.5.4. Corrosive Environment

This product has been successfully tested in a corrosion test according to IEC 60068-2-60, method 3. This means that the product meets the requirements to be placed in an environment classified as ISA-S71.04 class G3.



CORROSIVE GASES

If the product is placed in a corrosive environment, it is important that all unused connector sockets are protected with a suitable plug, in order to avoid corrosion attacks on the gold plated connector pins.

2.5.5. Simplified Declaration of Conformity

Hereby, Westermo declares that this product is in compliance with applicable EU directives. The full declaration of conformity and other detailed information is available at www.westermo.com/support/product-support.



Figure 2. The European Conformity Assessment marking

3. Product Description

3.1. Product Description

The Lynx 3000 series Gen2 comprises compact, high-performance managed Ethernet switches and routers for mission-critical OT networks. Based on the Lynx 3000 generation 2 platform, the range provides layer 2 switching and layer 3 routing, with Ethernet speeds up to 2.5 Gbit/s and a choice of copper, SFP and PoE configurations.

Engineered for demanding environments, Lynx 3000 Gen2 devices feature rugged, fanless IP40 full-metal housings and operate from -40 to +70 °C. Industrial-grade components and testing for vibration, shock, humidity, corrosive gases and electrical disturbances support high availability and a long service life. Available certifications and type-test compliance support deployment in industrial, marine and trackside environments.

The range extends from models for standard industrial connectivity to multi-gigabit variants for bandwidth-intensive applications. Support for resilient layer 2 networks, advanced layer 3 routing and network segmentation enables customers to address different requirements using a common product family. This simplifies network design, configuration and lifecycle management across sites and applications.

Selected PoE models provide a total power budget of up to 240 W, delivering power and data over a single cable. This simplifies the installation of HD cameras, wireless access points and other powered industrial devices. Advanced PoE management enables remote monitoring and control of connected equipment.

Powered by WeOS, Lynx 3000 series Gen2 provides comprehensive functionality for network redundancy, routing, segmentation, management and security. Secure boot verifies software integrity during startup, while the Trusted Platform Module (TPM) provides a hardware root of trust for protecting cryptographic keys and sensitive data. VPN, stateful firewall and IEEE 802.1X capabilities help protect network access and communications. Lynx 3306, Lynx 3310 and Lynx 3510 Gen2 variants are certified to IEC 62443-4-2 Security Level 2.

Available in two mechanical designs with flexible mounting options, the Lynx 3000 series Gen2 is suited to transportation, manufacturing, energy, smart cities and other critical infrastructure applications requiring secure connectivity, high availability and long-term reliability.

3.2. Available Models


Art. no.	Model ^a .	SFP ports	RJ45 ports (PoE)	Other ports & interfaces	
Form factor A - 6 ports					
3627-1600	Lynx-3306-F2G-T4-LV	2 x 1 Gb	4 x 100 Mb	-	
3627-1610	Lynx-3306-E-F2G-T4-LV				
Form factor A - 10 ports					
3627-1560	Lynx-3310-F2G-T8-LV	2 x 1 Gb	8 x 100 Mb	-	
3627-1561	Lynx-3310-F2G-T8-LV-CC				
3627-1570	Lynx-3310-E-F2G-T8-LV				
3627-1571	Lynx-3310-E-F2G-T8-LV-CC				
3627-1520	Lynx-3510-F2G-T8G-LV		2 x 2.5 Gb	8 x 1 Gb	I/O, micro SD
3627-1521	Lynx-3510-F2G-T8G-LV-CC				
3627-1530	Lynx-3510-E-F2G-T8G-LV				
3627-1531	Lynx-3510-E-F2G-T8G-LV-CC				
3627-1540	Lynx-3510-F2G2.5-T8G-LV				
3627-1541	Lynx-3510-F2G2.5-T8G-LV-CC				
3627-1550	Lynx-3510-E-F2G2.5-T8G-LV				
3627-1551	Lynx-3510-E-F2G2.5-T8G-LV-CC				
3627-1500	Lynx-3510-F2G-P8G-LV	2 x 1 Gb	8 x 1 Gb (8 x PoE+, 802.3at)		
3627-1501	Lynx-3510-F2G-P8G-LV-CC				
3627-1510	Lynx-3510-E-F2G-P8G-LV				
3627-1511	Lynx-3510-E-F2G-P8G-LV-CC				
3627-1580	Lynx-3510-F2G2.5-P8G-LV	2 x 2.5 Gb			
3627-1590	Lynx-3510-E-F2G2.5-P8G-LV				
3627-0620	Lynx-3510-F4G-T6G-LV	4 x 1 Gb	6 x 1 Gb		
3627-0630	Lynx-3510-E-F4G-T6G-LV				
3627-0640	Lynx-3510-F2G2.5-F2G-T6G-LV	2 x 1 Gb 2 x 2.5 Gb			
3627-0650	Lynx-3510-E-F2G2.5-F2G-T6G-LV				

^aE = extended level (layer 3), non-E = standard level (layer 2), CC = conformal coating

Art. no.	Model ^a .	SFP ports	RJ45 ports (PoE)	Other ports & interfaces
Form factor B - 18 ports				
3627-4020	Lynx-3518-F4G-T14G-LV	4 x 1 Gb	14 X 1 Gb	I/O, micro SD
3627-4030	Lynx-3518-E-F4G-T14G-LV			
3627-4060	Lynx-3518-F2G2.5-F2G-T14G-LV	2 x 1 Gb 2 x 2.5 Gb		
3627-4070	Lynx-3518-E-F2G2.5-F2G-T14G-LV			

^aE = extended level (layer 3), non-E = standard level (layer 2), CC = conformal coating

3.3. Hardware Overview

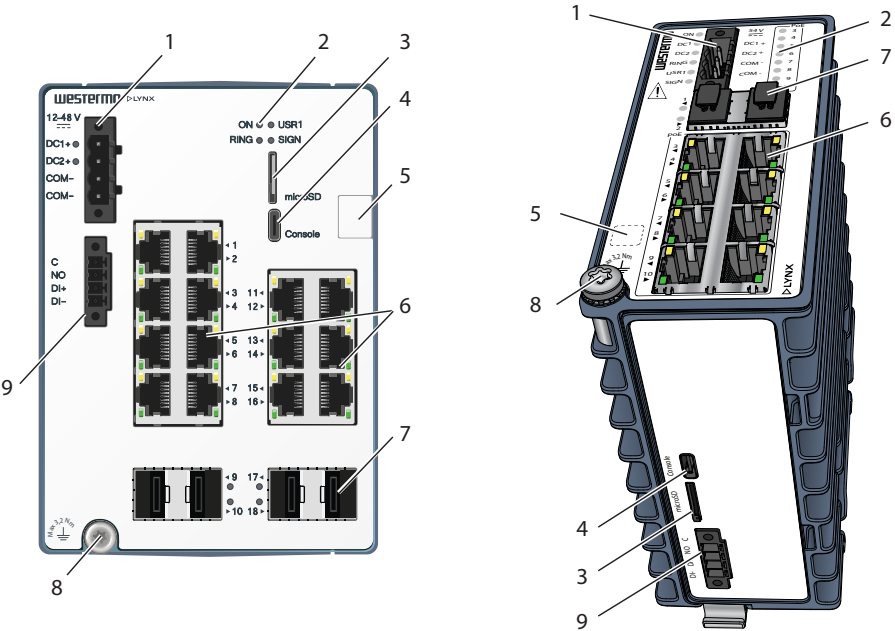

Illustrated by a Lynx-3518-F4G-T14G-LV and a Lynx-3510-F2GP8G-LV

Figure 3. Location of interface ports and LED indicators

No.	Description	No.	Description
1	Power port	2	LED indicators
3	Micro SD ^a .	4	Console port
5	Label with data matrix ^b .	6	Ethernet TX ports
7	SFP ports	8	Protective earth terminal
9	I/O port ^a .		

^aNot applicable for all models

^bThe front label provides MAC address and production date

3.4. Connector Information

3.4.1. Power Input


Illustration	Position	Product marking	Direction	Description
	1	DC1+	Input	Supply voltage
	2	DC2+	Input	Supply voltage
	3	COM-	Input	Common
	4	COM-	Input	Common

Table 6. Power input



POWER SUPPLY CONNECTION

There are safety regulations governing the power source that can be used in conjunction with the product. Refer to chapter Interface Specifications.

3.4.2. I/O Connection


Illustration	Pin no.	Product marking	Direction	Description
	1	C	Output	Relay output common
	2	NO	Output	Relay output normally open
	3	DI +	Input	Digital in +
	4	DI -	Input	Digital in -

Table 7. I/O connection

The relay output is a potential free, opto-isolated, normally open, solid-state relay. This can be configured to monitor various alarm events within the unit, see *WeOS User guide*. An external load in series with an external voltage source is required for proper functionality. For voltage/current, see Interface Specifications.

The Digital in is an opto-isolated digital input, which can be used to monitor external events. For voltage/current, see Interface Specifications.

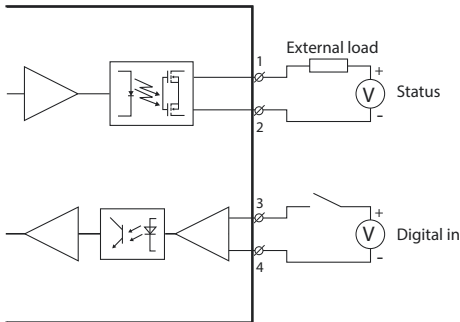


Figure 4. Digital in

3.4.3. Console Port

The console port can be used to connect to the CLI (Command Line Interface). The console connector is a USB-C cable that connects to a FTDI FT232R USB to serial converter internally. For drivers, refer to www.ftdichip.com and download the appropriate VCP driver.

3.4.4. SFP Transceivers

The product supports UL/IEC/CSA certified transceivers only. See Westermo's modular transceivers datasheets 100 Mbit, 1 Gbit and 2.5 Gbit SFP transceivers, which can be downloaded from the product support pages at www.westermo.com/support/product-support.

To maximize the life length of SFPs, it may be necessary to limit the operating temperature, see table [Type Tests and Environmental Conditions \[30\]](#).

Each SFP slot can hold one SFP transceiver. See "Transceiver User Guide" for transceiver handling instructions, which also can be downloaded from the product support pages at www.westermo.com/support/product-support.

In the event of contamination, the optical connectors in the SFP transceivers should only be cleaned by the use of forced nitrogen and some kind of cleaning stick. Recommended cleaning fluids are methyl-, ethyl-, isopropyl- or isobutyl alcohol, hexane or naphtha.



HANDLING OF SFP TRANSCEIVERS

SFP transceivers are supplied with plugs to avoid contamination inside the optical port. They are very sensitive to dust and dirt. If the fibre optic cable is disconnected from the product, a protective plug must be used on the transmitter/receiver. The protective plug must be kept on during transportation. The fibre optic cable must be handled the same way.

3.5. LED Indicators

LED	Status	Description
ON	OFF	Product has no power
	GREEN	All OK, no alarm condition
	RED	Alarm condition, or until product has started up. (Alarm conditions are configurable, see <i>WeOS5 User Guide</i>)
DC1	OFF	Product has no power
	GREEN	Power OK on DC1
	RED	Input voltage on DC1 is below rated voltage limit
DC2	OFF	Product has no power
	GREEN	Power OK on DC2
	RED	Input voltage on DC2 is below rated voltage limit
RING	OFF	All ring protocols are disabled
	GREEN	All ring protocols are OK
	RED	A ring protocol has an error
	FLASH	Green flash: All ring protocols are OK. The device acts as master/focal-point/root. Red flash: A ring protocol has an error. The device acts as master/focal-point/root.
USR1	Configurable, see <i>WeOS5 User Guide</i>	
SIGN	OFF	Product has no power
	GREEN	Approved software
	RED	Not approved software
TX/FX ports	OFF	No link
	GREEN	Link established. Green flash: Data traffic indication
	YELLOW	Port alarm, or port is set in blocking state by link redundancy protocol Yellow flash: Location indicator ("Here I am"). Function activated via WeConfig tool, or web or CLI.
PoE^a	OFF	No PoE output
	GREEN	PoE output active Green flash: Error or negotiating power output

^aOnly available for PoE models

Table 8. LED indicators

3.6. Dimensions

Dimensions are stated in mm and are regardless of model.

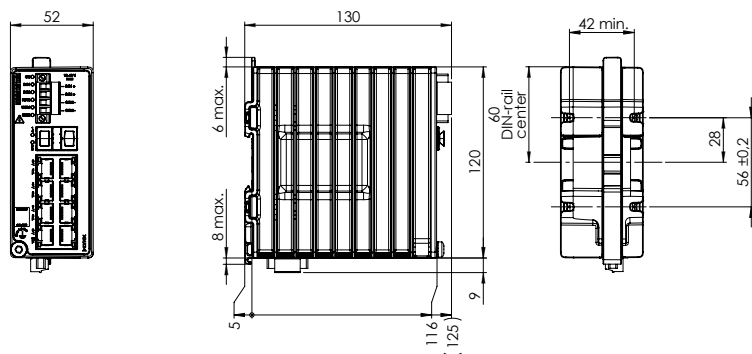


Figure 5. Dimensional drawing - Form factor A

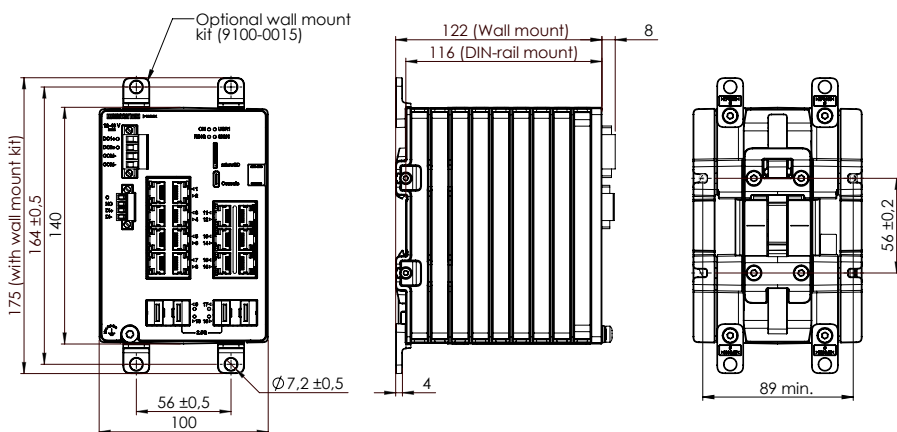


Figure 6. Dimensional drawing - Form factor B

4. Installation

4.1. Mounting

This product should be mounted on a TH 35-7.5 rail or TH 35-15, according to IEC/EN 60715 standard, which is horizontally mounted inside an apparatus cabinet or similar dry location.

1. To mount the product, first push the support pin down, then towards the front of the product to lock the support pin.
2. Then, place the product on to the DIN-rail. First the upper part, then the lower part of the product.
3. Lastly, push the support pin forward to lock the product to the DIN-rail. Make sure the products is secured to the DIN-rail.

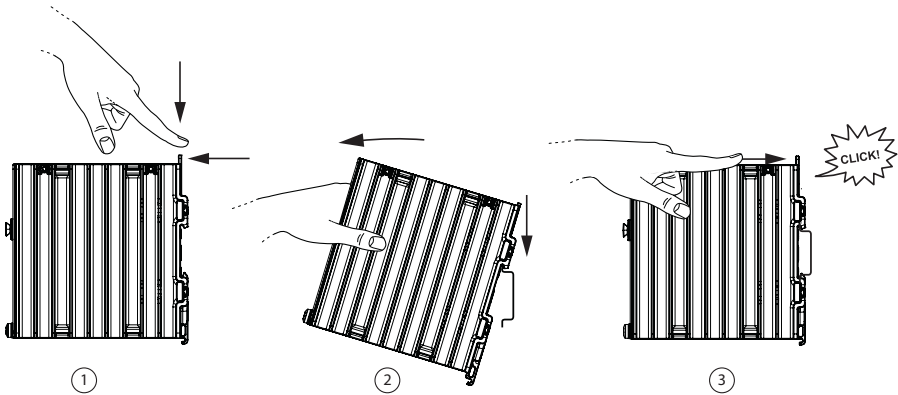


Figure 7. Mounting of product

4.2. Removal of Product

To remove the product, either push the support pin down and towards the front of the product, or press down the support at the back with a screwdriver and lift off the product from the DIN-rail.

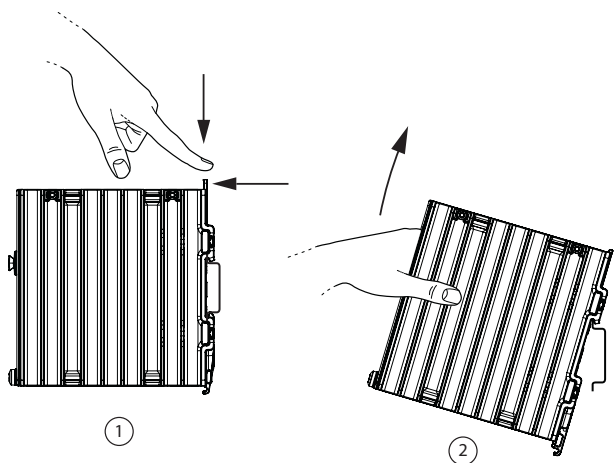


Figure 8. Removal of product by pushing the support pin

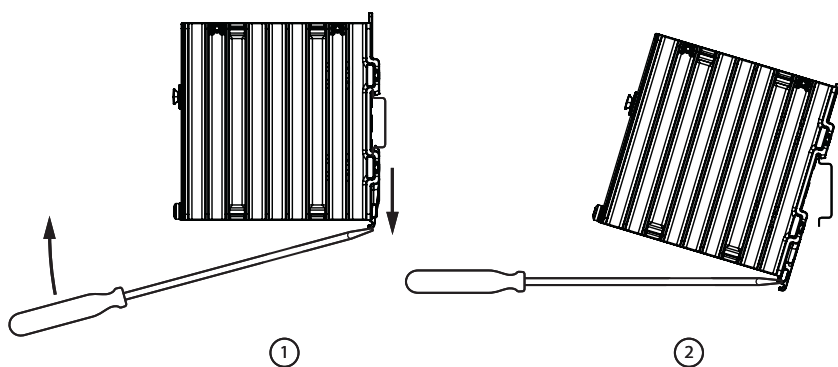


Figure 9. Removal of product with screwdriver

4.3. Panel Mounting

The product can be mounted to a panel with cage nuts made for 5.3 mm square holes with a 1-1.6 mm panel thickness.


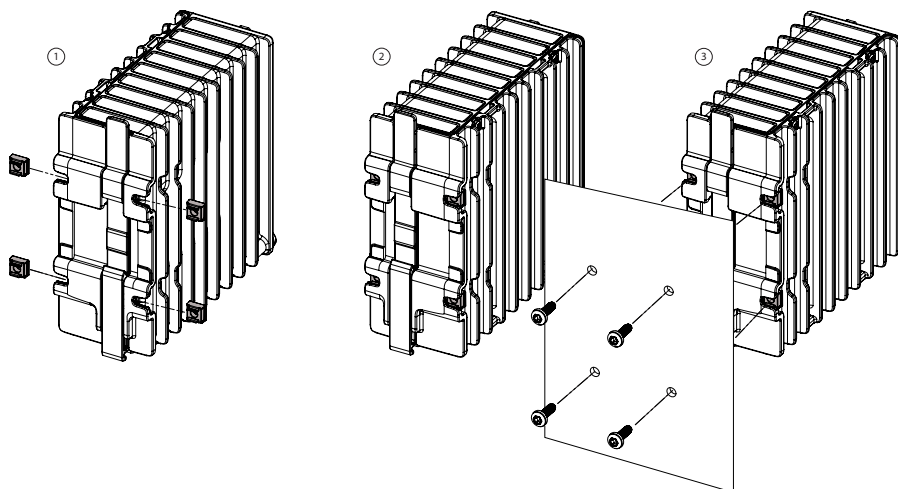


Figure 10. Panel mounting with cage nuts

4.4. Wall Mounting

All products can be mounted to a wall with screws. Form factor B products can also be wall mounted with brackets (sold as accessories).

Figure 11. Wall mounting with screws, and with brackets

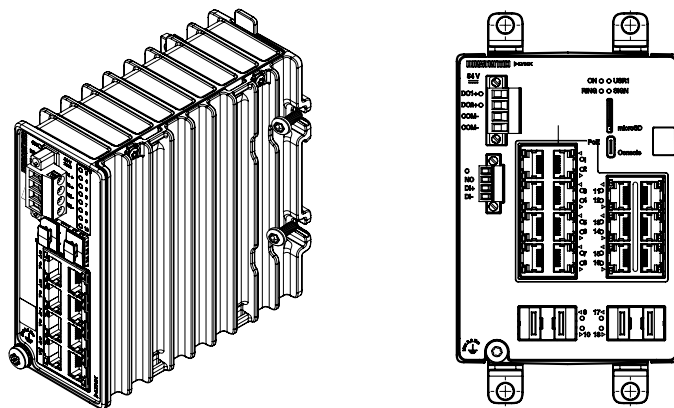

4.5. Cable Strap

Form factor A has loops on the right side that cable straps can be attached to, to help collecting the connector cables and lead them aside.

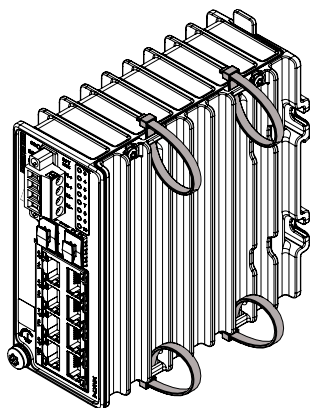


Figure 12. Cable straps

4.6. Functional Earth Connection

For correct function, the earth connection needs to be properly connected to a designated PE rail. Torx: T25 and torque: 3.2 Nm.

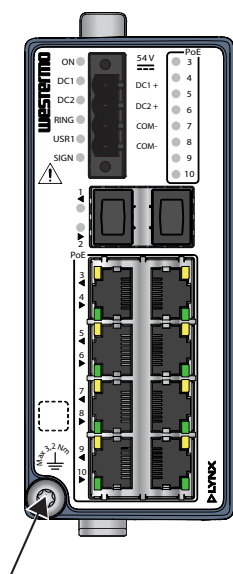


Figure 13. Earth connection

4.7. Cooling

This unit uses convection cooling. Spacing is required for the use of unit in full operating temperature range and service life. To avoid obstructing the airflow around

the unit, a minimum spacing of 25 mm (1.0 inch) above and below, and 10 mm (0.4 inches) left and right of the unit must be fulfilled.

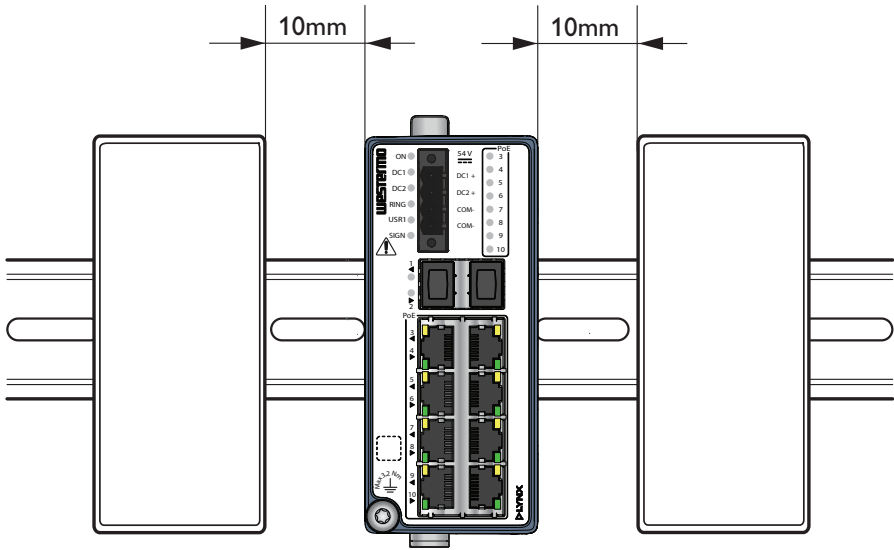


Figure 14. Minimum spacing of product

4.8. Ambient Temperature

Ambient temperature affects the life length of electronic components. Prolonged exposure to high temperatures can reduce the overall life length. See temperature information in [Type Tests and Environmental Conditions \[30\]](#) for more information.

5. Specifications

5.1. Interface Specifications

Art.no 3627-	1	2	3	4	5	6	7	8	9	10	
	Port number										
0620 to 0630 1520 to 1531	F1G				T1G						
0640 to 0650	F2.5G	F1G									
1500 to 1511	F1G	T1G P30W									
1540 to 1551	F2.5G	T1G									
1570 to 1571	F1G	T100									
1580 to 1590	F2.5G	T1G P30W									
1600 to 1610	F1G	T100					-				

Table 9. Port specification for form factor A of Lynx 3000 series Gen2

Art.no 3627-	1 to 8	9	10	11 to 16	17	18
	Port number					
4020 to 4030	T1G	F1G		T1G	F1G	
4060 to 4070	T1G	F1G	F2.5G	T1G	F2.5G	F1G

Table 10. Port specification for form factor B of Lynx 3000 series Gen2

Fibre ports - F1G - SFP ports	
Connector	SFP slot holding fibre transceiver
Optical/Electrical specification	IEEE std 802.3
Data rate	1 Gbit/s 100 Mbit/s with smart SFP module
Duplex	Full or half, manual or auto
Transmission range	Depending on transceiver


Fibre ports - F2.5G - SFP ports	
Connector	SFP slot holding fibre transceiver
Optical/Electrical specification	IEEE std 802.3
Data rate	2.5 Gbit/s 1 Gbit/s 100 Mbit/s with smart SFP module
Duplex	Full or half, manual or auto
Transmission range	Depending on transceiver

Copper ports - T1G - Ethernet TX	
Connector	RJ-45
Electrical specification	IEEE std 802.3.
Data rate	10 Mbit/s, 100 Mbit/s, 1000 Mbit/s, manual or auto
Duplex	Full or half, manual or auto
Circuit type	Non-PoE products: TVN-1 PoE products: SELV
Transmission range	Up to 100 m with CAT5e cable or better
Isolation	Non-PoE products: all other ports PoE products: All other ports except other PoE ports and DC power port
Cabling	Shielded cable CAT5e or better is recommended
Conductive chassis	Yes

Copper ports - T100 - Ethernet TX	
Connector	RJ-45
Electrical specification	IEEE std 802.3.
Data rate	10 Mbit/s, 100 Mbit/s, manual or auto
Duplex	Full or half, manual or auto
Circuit type	Non-PoE products: TNV-1 PoE products: SELV
Transmission range	Up to 100 m with CAT5e cable or better
Isolation	Non-PoE products: all other ports PoE products: All other ports except other PoE ports and DC power port
Cabling	Shielded cable CAT5e or better is recommended
Conductive chassis	Yes

PoE - P30W	
Standard	IEEE 802.3at; "PoE+"
Type	2
Class	Up to 4
2P/4P	2 pair, mode A
LLDP	No
Output voltage	50-57 VDC ^a .
Output power	Max 30 W
Cabling	Shielded cable CAT5e or better is recommended
Conductive chassis	Yes

^aFollows the input voltage

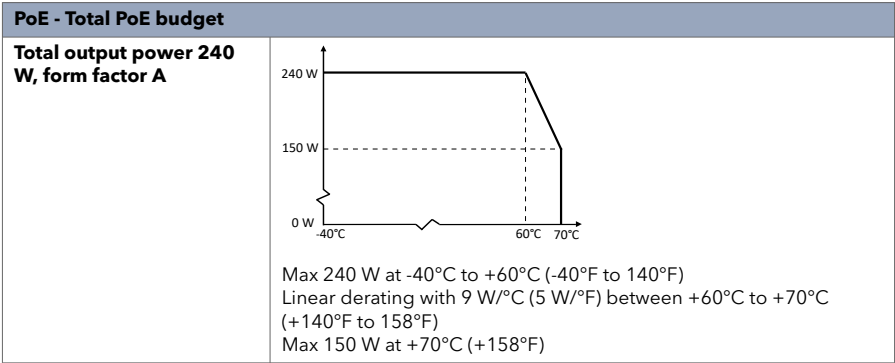

Other interfaces - DC, Power port (non-PoE models)		
Rated voltage^a	12 to 48 VDC, Class III (SELV/PELV) ^b	
Operating voltage	9.6 to 60 VDC	
Rated current	Form factor A; Lynx-3510(-E)-F4G-T6G-LV and Lynx-3510(-E)-F2G2.5-F2G-T6G-LV: Max 1.1 A at 12 VDC, max 0.27 A at 48 VDC Form factor A, all others: Max 0.6 A at 12 VDC, max 0.16 A at 48 VDC Form factor B: Max 1.2 A at 12 VDC, max 0.29 A at 48 VDC	
Fuse rating^c	Denote time-delay fuse	4.0 A(T)
Rated frequency	DC	
Inrush current, I²t^d	Form factor A: 175 mA ² s at 12 VDC 287 mA ² s at 48 VDC Form factor B: 43 mA ² s at 12 VDC 782 mA ² s at 48 VDC	
Startup current	2 x nominal current	
Polarity	Reverse polarity protected	
Redundant power input	Yes	
Isolation	All other ports	
Connector	Detachable screw terminal connector	
Conductor cross section (flexible)	0.2-2.5 mm ² (AWG 30-12). Use copper conductors only.	
Stripping length cable	10 mm	
Cable temperature rating	For minimum temperature rating of the cable to be connected to the field wiring terminals minimum + 90 °C	
Circuit type	SELV	
Shielded cable	Not required	

^aOnly CE-compliant Class I or Class II power supplies with SELV/PELV output shall be used with the product

^bThis equipment is considered equivalent to Class III equipment, even though the internal voltage of switching transformer exceeds the specified level of 6.3.1 in EN/IEC/UL 61010-1. The voltage at the accessible part does not exceed the limit of 6.3.2 in EN/IEC/UL 61010-1 during a single fault condition.

^cThese products are supplied with an internal fuse and must not be changed or modified

^dMeasured for 1 second at startup

Other interfaces - DC, Power port (PoE models)		
Rated voltage^a	54 VDC, Class III (SELV/PELV) ^b	
Operating voltage	802.3at (PoE+)/802.3ab (PoE++): 53 to 57 VDC 802.3af: 48 to 57 VDC No PoE usage: 12 to 57 VDC	
Rated current	Form factor A: Max. 4.8 A Form factor B: PoE models not available	
Fuse rating^c	Denote time-delay fuse	Form factor A: 6.3 A(T) Form factor B: PoE models not available
Rated frequency	DC	
Inrush current, I²t^d	Form factor A: 320 mA ² s at 54 VDC Form factor B: PoE models not available	
Startup current	2 x nominal current	
Polarity	Reverse polarity protected	
Redundant power input	Yes	
Isolation	All other ports except Ethernet TX port	
Connector	Detachable screw terminal connector	
Conductor cross section (flexible)	0.2-2.5 mm ² (AWG 30-12). Use copper conductors only.	
Stripping length cable	10 mm	
Cable temperature rating	For minimum temperature rating of the cable to be connected to the field wiring terminals minimum + 90 °C	
Circuit type	SELV	
Shielded cable	Not required	

^aOnly CE-compliant Class I or Class II power supplies with SELV/PELV output shall be used with the product

^bThis equipment is considered equivalent to Class III equipment, even though the internal voltage of switching transformer exceeds the specified level of 6.3.1 in EN/IEC/UL 61010-1. The voltage at the accessible part does not exceed the limit of 6.3.2 in EN/IEC/UL 61010-1 during a single fault condition.

^cThese products are supplied with an internal fuse and must not be changed or modified

^dMeasured for 1 second at startup

Other interfaces - I/O connection, Digital input ^{a,b}	
Isolation to	All other ports, except relay output
Connector	Detachable screw terminal connector
Conductor cross section	0.2-1.5 mm ² (AWG 24-16). Use copper conductors only.
Stripping length cable	10 mm
Circuit type	SELV
Maximum voltage/current	60 VDC, I _{IN} ≤ 2.9 mA at 60 VDC
Voltage levels	Logic one: >8 VDC Logic zero: <5 VDC

^aNot applicable for Lynx 3306 and Lynx 3310 models

^bExternal circuits connected to I/O connectors shall be SELV-rated circuits, galvanic isolated from mains

Other interfaces - I/O connection, Relay output^{a,b}

Connect resistance	Maximum 30 Ω
Isolation to	All other ports, except digital input
Connector	Detachable push-in terminal
Conductor cross section	0.2-1.5 mm ² (AWG 24-16). Use copper conductors only.
Stripping length cable	10 mm
Circuit type	SELV
Maximum voltage/ current	60 VDC/80 mA

^aNot applicable for Lynx 3306 and Lynx 3310 models

^bExternal circuits connected to I/O connectors shall be SELV-rated circuits, galvanic isolated from mains

**NOTE**

The product is to be connected to internal Ethernet networks without exiting a facility and being subjected to TNVs.

Other interfaces - Console port

Electrical specification	USB 2.0 device interface
Data rate	Emulates UART, settings 115200 bps
Circuit type	SELV
Maximum supply current	100 mA
Connector	USB-C connector in device mode

Other interfaces - Micro SD^a

Electrical specification	Secure Digital 2.0
Circuit type	SELV
Maximum supply current	100 mA
Connector	Micro SD connector

^aNot applicable for Lynx 3306 and Lynx 3310 models

5.2. Type Tests and Environmental Conditions

Environmental phenomena	Basic standard	Description	Test levels
ESD	EN 61000-4-2	Enclosure	Contact: ±6 kV Air: ±8 kV
Fast transients	EN 61000-4-4	Power port	± 2 kV, 5 kHz, 100 kHz Direct coupling
		Earth port	
		I/O port	± 2 kV, 5 kHz, 100 kHz Capacitive coupling clamp
		Ethernet ports	
Surge	EN 61000-4-5	Power port	L-E: ± 1 kV, 12 Ω, 9 μF, 1.2/50 μs L-E: ± 2 kV, 42 Ω, 0.5 μF, 1.2/50 μs L-L: ± 0,5 kV, 2 Ω, 18 μF, 1.2/50 μs L-L: ± 1 kV, 12 Ω, 9 μF, 1.2/50 μs L-L: ± 1 kV, 42 Ω, 0,5 μF, 1.2/50 μs
		I/O port	L-E: ± 2 kV, 42 Ω, 0.5 μF, 1.2/50 μs L-E: ± 1 kV, 12 Ω, 9 μF, 1.2/50 μs L-L: ± 1 kV, 42 Ω, 0.5 μF, 1.2/50 μs L-L: ± 1 kV, 12 Ω, 9 μF, 1.2/50 μs
		Ethernet ports	L-E: ± 2 kV, 2 Ω, direct on shield, 1.2/50 μs
Power frequency magnetic field	EN 61000-4-8	Enclosure	100 A/m, 16.7, 50 and 60 Hz 300 A/m DC
Pulsed magnetic field	EN 61000-4-9	Enclosure	300 A/m
Radiated RF immunity	EN 61000-4-3	Enclosure	20 V/m, 80 MHz to 2,7 GHz 10 V/m, 2.7 to 6 GHz
Conducted RF immunity	EN 61000-4-6	Power port	10 V, 80% AM, 1 kHz, 0.15 to 80 MHz Spot frequencies: 2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz
		Earth port	
		I/O port	
		Ethernet ports	
Radiated RF emission	CISPR 16-2-3	Enclosure	Class A (30 MHz to 6 GHz) DNV-CG; Bridge and Deck Zone (0.15 to 6 GHz) Class A, FCC Part 15 B (30 MHz to 8 GHz) (non-PoE models) Class A, FCC Part 15 B (30 MHz to 7 GHz) (PoE models)
	ANSI C63,4		
Conducted RF emission	CISPR 16-2-1	Power port	Class A (0.15 to 30 MHz)
	ANSI C63.4		DNV-CG - Bridge and Deck Zone (0.01 to 30 MHz)
			Class A, FCC Part 15 B (0.15 to 30 MHz)
	CISPR 22	Ethernet ports	Class A (0.15 to 30 MHz)
Compass safe distance	IEC 60945	Enclosure	Minimum safe distance to: Standard compass: 15 cm

Environmental phenomena	Basic standard	Description	Test levels
			Steering compass: 10 cm
Power supply failure	DNV-CG-0339	Power port	U_N -100%, 30 s
Power supply variation	DNV-CG-0339	Power port	$1.3 \times U_N$ (62.4 VDC), $0.75 \times U_N$ (18 VDC), 15 min
Supply surge withstand capability^a	AREMA	Power port	$3 \times U_N$ (24 VDC), 80 ms
Immunity to conducted low frequency interference	DNV-CG-0339	Power port	3 Vrms, 0.05 to 10 kHz
Insulation resistance (non-PoE models)	DNV-CG-0339	Power port and Ethernet ports to all other ports, incl. chassis	500 VDC, 60 s
		I/O port to all other ports incl. chassis	
	IEEE 802.3	Ethernet ports to all other ports incl. chassis	
Insulation resistance (PoE models)	DNV-CG-0339	Power port and Ethernet PoE ports to all other ports, incl. chassis	500 VDC, 60 s
		I/O port to all other ports incl. chassis	
	IEEE 802.3	Power port and Ethernet PoE ports to all other ports, incl. chassis	
Dielectric strength (non-PoE models)	DNV-CG-0339	I/O port to all other ports, incl. chassis	1500 VAC rms, 60 s
	DNV-CG-0339	Power port to all other ports, incl. chassis	2250 VDC, 60 s
	IEEE 802.3		
	IEEE 802.3	Ethernet ports to all other ports incl. chassis	

Environmental phenomena	Basic standard	Description	Test levels
Dielectric strength (PoE models)	DNV-CG-0339	I/O port to all other ports, incl. chassis	1500 VAC rms, 60 s
	DNV-CG-0339	Power port and Ethernet PoE ports to all other ports, incl. chassis	2250 VDC, 60 s
	IEEE 802.3		

^aApplicable for Lynx(-E)-3510-F4G-T6G-LV, Lynx(-E)-3510-F2G2.5-F2G-T6G-LV and all form factor B models (Lynx-3518)

Table 11. EMC and electrical conditions

Environmental phenomena	Basic standard	Description	Test levels
Temperatures	EN 60068-2-1 EN 60068-2-2	Operational	-40 to +70 °C (-40 to +158 °F) <i>Limitation:</i> -Copper SFP is -40 to +65 °C (-40 to +149 °F) -PoE, see Interface Specifications [24] Total PoE budget
		Storage and transport	-40 to +85 °C (-40 to +185 °F) ^a
Cooling			Convection, see Mounting [19] for instructions
Humidity	EN 60068-2-30	Damp heat, cyclic	+25 to 55 °C, 95% RH 2 cycles (12+12 hours) = 48 hours
Corrosive gases	IEC 60068-2-60	Operational	Method 3, 21 days ^b
Altitude		Operational	2000 m/80 kPa
MTBF hours	Telcordia SR-332, issue 3		Lynx-: 3306(-E)-F2G-T4-LV and 3510(-E)-F2G-T8G-LV(-CC): 1,035,000 h 3310(-E)-F2G-T8-LV(-CC): 1,138,000 h 3510(-E)-F2G2.5-F2G-T6G-LV and 3510(-E)-F4G-T6G-LV: 1,022,000 h 3510-F2G-P8G-LV(-CC) and 3510(-E)-F2G2.5-P8G-LV: 638,000 h 3518(-E)-F4G-T14G-LV and 3518(-E)-F2G2.5-F2G-T14G-LV: 1,071,000 h
	MIL-HBDK-217F		Lynx-: 3306(-E)-F2G-T4-LV, 3510(-E)-F2G-T8G-LV(-CC) and 3510(-E)-F2G2.5-T8G-LV(-CC): 879,000 h 3310(-E)-F2G-T8-LV(-CC): 974,000 h 3510(-E)-F4G-T6G-LV and 3510(-E)-F2G2.5-F2G-T6G-LV: 662,000 h 3510-F2G-P8G-LV(-CC) and 3510(-E)-F2G2.5-P8G-LV: 583,000 h 3518(-E)-F4G-T14G-LV and 3518(-E)-F2G2.5-F2G-T14G-LV: 460,000 h
Vibration^c	IEC 60068-2-6 (sine)	Operational	5 to 8 Hz at ± 7.5 mm 8 to 500 Hz at 2 g 5 sweep cycles in each axis (3 x 5), 1 octave/min
	IEC 60068-2-64 (random)	Operational	5 Hz: $0.02 (m/s^2)^2/Hz$ 600-2000 Hz: $0.001 (m/s^2)^2/Hz$ RMS: $3.6 m/s^2$ 3 axis, 90 min/axis 2-13.2 Hz: 12 dB/oct 13.2-100 Hz: $0.011 g^2/Hz$ RMS: 1 g

Environmental phenomena	Basic standard	Description	Test levels
			3 axis, 150 min/axis
Shock	IEC 60068-2-27	Operational	10 g/11 ms, 3 x 6 shocks, saw-tooth 10 g/ 30 ms, 3 x 6 shocks, half-sine 15 g/11 ms, 3 x 6 shocks, half-sine
Enclosure	EN 61010-1	Aluminum	Fire enclosure
Weight			Form factor A: 1100 gr Form factor B: 1930 gr
Degree of protection	EN 60529	Enclosure	IP40
Overvoltage category	EN/IEC 61010-1		OVC II
Pollution degree	EN/IEC 61010-1, EN 50124-1		PD2 macro and micro environment
Location	EN/IEC 61010-1		Indoor

^a.-55 to +85 °C (-48,3 to +185 °F) for Lynx-3510(-E)-F4G-T6G-LV and Lynx-3510(-E)-F2G2.5-T6G-LV

^bMethod 3, 21 days corresponds to Harsh Industrial Environment G3 which is defined in ANSI/ISA 17.04: 2015

^cThe power and I/O cables need to be fastened 200 mm or closer to the unit. The same recommendation applies to the Ethernet cables.

Table 12. Environmental and mechanical conditions

6. Revision Notes

Revision	Date	Change description
Rev. A	2026-06	First revision

Westermo

Westermo • Metallverksgatan 6, SE-721 30 Västerås, Sweden

Tel +46 16 42 80 00 Fax +46 16 42 80 01

E-mail: info@westermo.com

www.westermo.com