

KM-3R

From serial no 1501 , the following changes are implemented:

The following switches have to be set before use

- ★ Baud rate
- ★ RTS-CTS delay
- ★ Transmit clock selection

RTS-CTS delay(S1)

ms	S1	1	2	3	4
0	■				
20		X			
40			X		
60				X	
80		X			
100			X		
120		X			
140			X		
160		X			
180			X		
200		X			
220			X		
240		X			
260			X		
280		X			
300			X		

Transmit Clock (X5)


Transmit Clock Selection	X5 Jumper at
Internal Transmit Clock (114, pin 15)	1-2 (see note)
Receive Clock (115, pin 17) synchronizes Transmit Clock (114 , pin 15)	2-3 (See note)
External Transmit Clock (113, pin 24)	1-2

Note: Only connect pin 24, when External Clock is wanted.
A clock signal on pin 24 overrides any other selection.

Baud rate (S2)

bit/s	S2	1	2	3	4	5
1200		X				
2400			X			
4800				X		
9600	■				X	
19200						X

Switch Locations

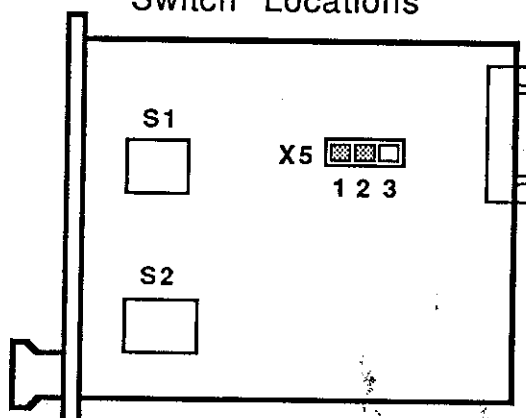

X = ON

■ = FACTORY SETTING