

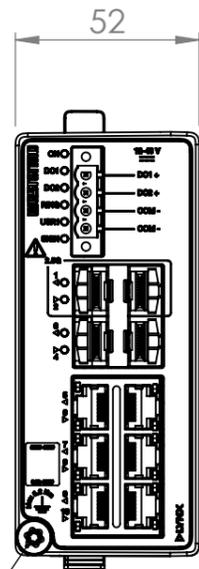


REVISIONS


Rev	Description	Designed	Reviewed	Approved	Date
01	Created	JEM	KTN	KTN	2025-05-07

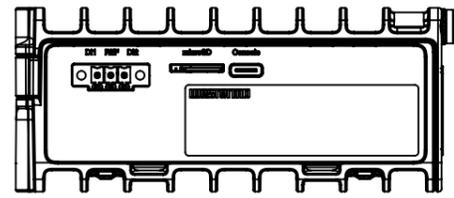


Grounding screw:
M5x12 (T25)
Max torque: 3,2 Nm

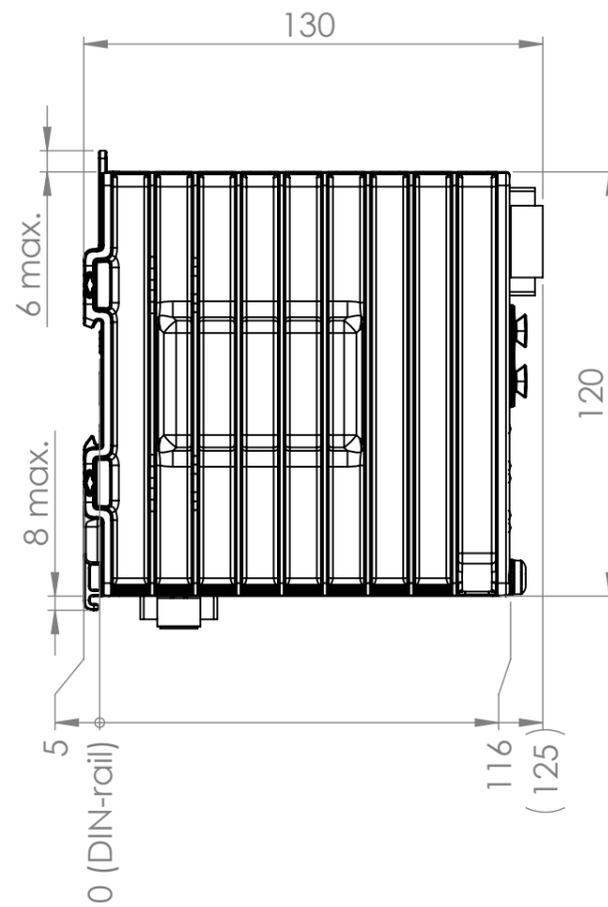

Wall mount (x4):
max. \varnothing 4,5 mm screw
or Cage nut for
panel hole \square 5,3 mm

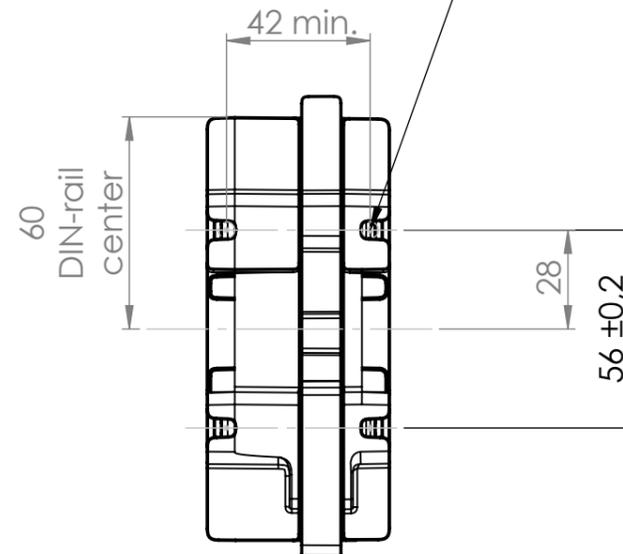


Label:
P/N, Type, Power

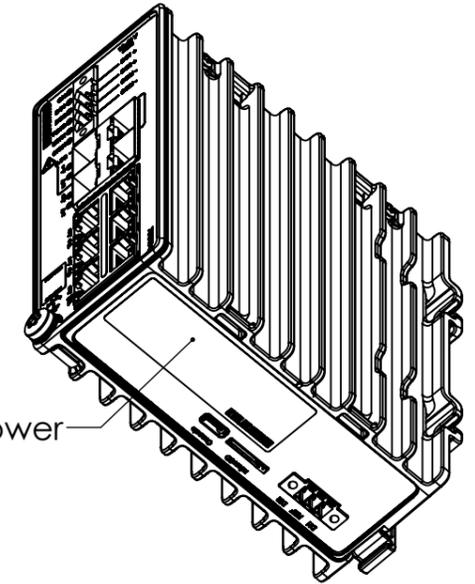

Power

2D-code:
P/N, S/N, MAC

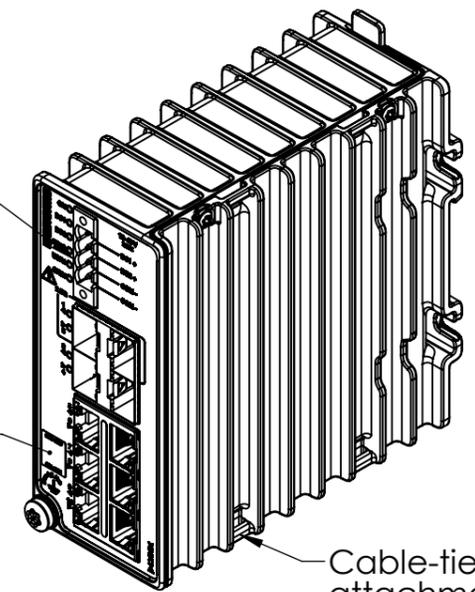

Cable-tie
attachment (x4)

Product list

Part Number	Type
3627-0640	Lynx-3510-F2G2.5-F2G-T6G-LV
3627-0650	Lynx-3510-E-F2G2.5-F2G-T6G-LV

Units mm	Material/Notes	Notes	Tolerance \pm 2 mm			
				Denomination Lynx-3510-F2G2.5-F2G-T6G-LV-BASE	Designer JEM	Approved KTN
Drawing No. F4T6 2.5G-UD-01		Status Approved				