


ComAnt[®] Communications Antennas




FREQUENCY INDEPENDENT DATA

Description: quarter wave whip, sleeve feed for proper matching with small sized radios
 Frequency: 405-440 MHz, 440-475 MHz, 830-890 MHz, 890-960 MHz
 Impedance: 50 ohm
 Gain: 2 dBi
 Polarization: vertical
 Connector: BNC-male/SMA-male/TNC-male
 VSWR: < 1.5
 Radome: PE, heath shrink adhesive tubing
 Radiator: copper
 Attachment: directly to terminal
 Temperature: -35° - +80° C
 IP: 62

CA420Q
quarter wave whip 2 dBi 405-440 MHz
3/8/2000

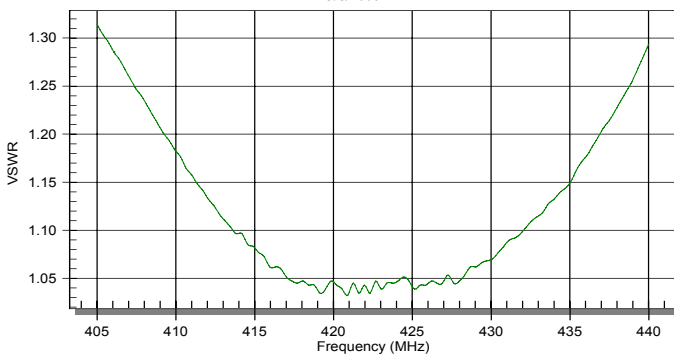

RADIATION PATTERN



— E dB — H dB

CAQ QUARTER WAVE WHIP